

347Vac Input with Selectable Output 50W or 70W Mini Electronic CMH Ballast Specifications

PS13E57T



INPUT SPECIFICATIONS

- Vac +/-10% 347Vac
- Amps @ 50W 0.158A
- Amps @ 70W 0.22A
- Power @ 50W 55W
- Power @ 70W 76W
- Frequency 50/60Hz
- THD <10%
- Power Factor 0.98%




OUTPUT SPECIFICATIONS

- Output Power (Selectable) 50W, 70W +/- 2%
- Lamp Drive Frequency 150Hz +/-10%
- Lamp Current Crest Factor <1.2
- Open Circuit Voltage >300V Square Wave
- Ignitor Voltage @ Ballast Leads >3.8KV
- Ignition Failure Timeout 30 Min. Shutdown
- Maximum distance from Ballast 2.5M or 10 Feet Max.
- Compatible 70W ANSI Lamp Types M143, M98, M85, M139
- Compatible 50W ANSI Lamp Types M110, M148

- Enclosure Overall Dimensions (Track)
- Unit Weight
- Operating Temperature
- EMI / RFI Compliance
- Sound Rating
- UL / CUL Listed

4.15" L x 3.15" W x 1.26" H
 25oz.
 Min. Temp -30°C - Max. Temp 90°C
 FCC Part 18
 Rated 'A'
 File #E173598

Wiring Diagram

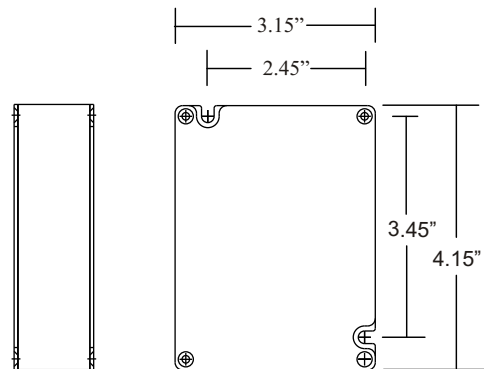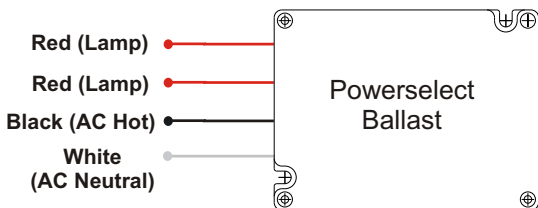

Output power selector switch

