


150W Electronic Metal Halide Ballast


120Vac Models PS15B90T & PS15B90S

277Vac Models PS15D90T & PS15D90S

347Vac Models PS15E90T & PS15E90S

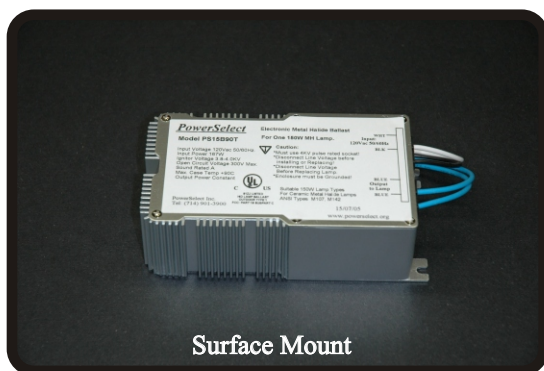

Surface Mount

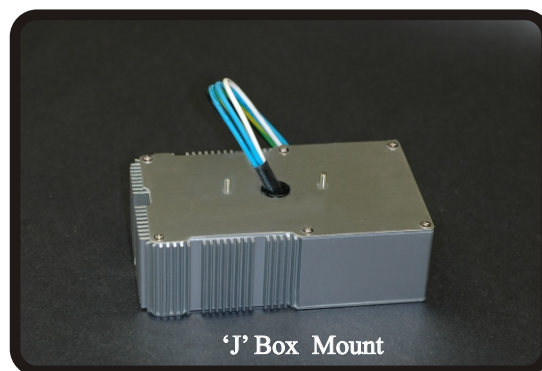

'J' Box Mount

INPUT PS15B90T&S PS15D90T&S PS15E90T&S

● Vac	120 +/-10%	277 +/-10%	347 +/-10%
● Amp's	1.38A	0.59A	0.47A
● Power	166W	165W	164W
● Freq.	50/60Hz	50/60Hz	50/60Hz
● THD	<7%	<8%	<10%
● PF	>99%	>99%	>99%






Please see ballast application guidelines for recommended wire routing in multiple lamp fixture applications..

OUTPUT SPEC'S ALL MODELS


● Lamp Power	150W +/- 2%
● Lamp Drive Frequency	150Hz +/-10%
● Lamp Current Crest Factor	<1.2
● Open Circuit Voltage	>300V Square Wave
● Ignitor Voltage @ Ballast Leads	>3.8KV
● Ignition Failure Timeout	30 Min. Shutdown
● Maximum distance from Ballast	3.0M or (9.8 feet) Max.
● Compatible ANSI Lamp Types	M81, M102, M142

MECHANICAL / ENVIRONMENTAL

● Enclosure Dimensions	See Below
● Unit Weight	49.8oz.
● Enclosure & Finish	Clear Anodized Extruded Aluminum
● Operating Temperature	-30° to 90° C
● EMI / RFI Compliance	FCC Part 18
● Sound Rating	Rated 'A'
● UL / CUL Listed	File #E173598
● Input Wire	UL 1015 18 ga. 105c, Length 8"
● Output Wire	UL SF 18 ga. 200c, Length 8"

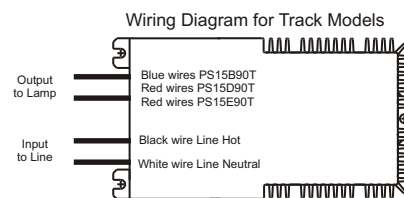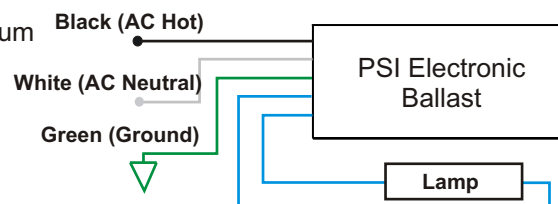

Wiring Diagram for Stud Models

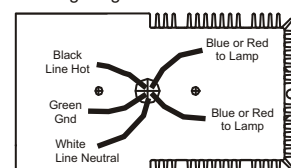

PowerSelect Inc.

Warranty up to 5 years when operated below 80C.

Tel: (714) 901-3900 Fax: (714) 901-0026
E-mail - sales@powerselectinc.com

PSI reserves the right to modify any specifications without notice..

Revised 07-10 -05