


PS60A703K 3x700ma LED Driver

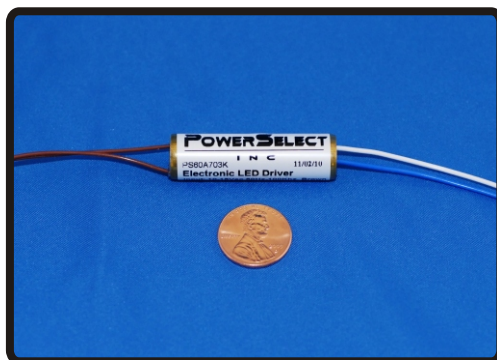

NOTE: The following specifications are for 3 x 700ma LED load

INPUT SPECIFICATIONS

- VAC 10-15Vac
- VDC 13-20VDC
- Frequency DC-100kHz
- Power 8W
- Transient Protection 40V Max.

OUTPUT SPECIFICATIONS



- Current (Iavg) 700ma +/-5%
- Short Circuit Protected
- Open Circuit Protected
- Output distance limited to 2 feet

MECHANICAL / ENVIRONMENTAL

- Enclosure Overall Dimensions
- Unit Weight
- Minimum Operating Temperature
- Maximum Operating Temperature
- Sound Rating
- Efficiency
- Potting Compound
- Enclosure
- Warranty

0.475" Dia. x 1.6" Length
 1 oz. approx.
 Min. Enclosure Temp -30°C
 Max. Enclosure Temp 70°C
 Rated 'A'
 >90%
 Flex-Polyurethane
 Copper Tube 0.475" O.D.
 3 Years if operated at $\leq 70^{\circ}\text{C}$

Wiring Diagram

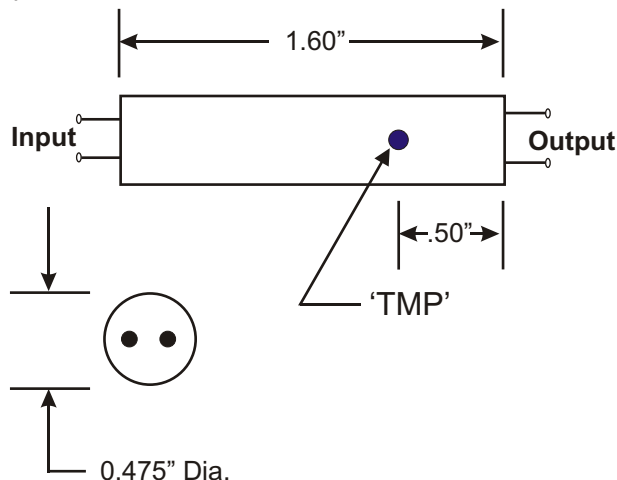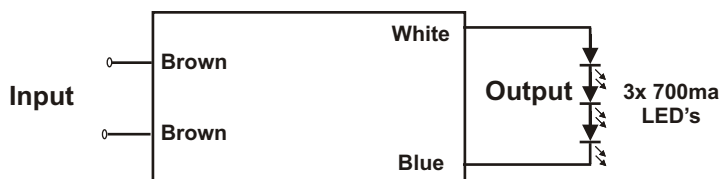

PSI reserves the right to modify any specifications without notice..